

# GW101 / GW201 SUPERCAPACITOR

## Datasheet Rev4.1, October 2015

This Datasheet should be read in conjunction with the CAP-XX Supercapacitors Product Guide which contains information common to our product lines.

### Electrical Specifications

The GW101 is a single cell supercapacitor. The GW201 is a dual cell supercapacitor with two GW101 cells in series, so GW201 capacitance = Capacitance of GW101/2 and GW201 ESR = 2 x GW101 ESR.

**Table 1: Absolute Maximum Ratings**

| Parameter        | Name              |       | Conditions | Min | Typical | Max  | Units |
|------------------|-------------------|-------|------------|-----|---------|------|-------|
| Terminal Voltage | V <sub>peak</sub> | GW101 |            | 0   |         | 2.75 | V     |
|                  |                   | GW201 |            |     |         | 5.5  |       |
| Temperature      | T <sub>max</sub>  |       |            | -40 |         | +70  | °C    |

**Table 2: Electrical Characteristics**

| Parameter                 | Name             |       | Conditions        | Min | Typical | Max | Units |
|---------------------------|------------------|-------|-------------------|-----|---------|-----|-------|
| Terminal Voltage          | V <sub>n</sub>   | GW101 |                   | 0   |         | 2.5 | V     |
|                           |                  | GW201 |                   | 0   |         | 5.0 |       |
| Capacitance               | C                | GW101 | DC, 23°C          | 740 | 800     | 960 | mF    |
|                           |                  | GW201 |                   | 320 | 400     | 480 |       |
| ESR                       | ESR              | GW101 | DC, 23°C          | 19  | 24      | 29  | mΩ    |
|                           |                  | GW201 |                   | 36  | 45      | 54  |       |
| Leakage Current           | I <sub>L</sub>   |       | 2.3V, 23°C 120hrs |     | 1       | 2   | μA    |
| RMS Current               | I <sub>RMS</sub> |       | 23°C              |     |         | 6   | A     |
| Peak Current <sup>1</sup> | I <sub>P</sub>   |       | 23°C              |     |         | 30  | A     |


<sup>1</sup>Non-repetitive current, single pulse to discharge fully charged supercapacitor.

**Table 3: Thickness**

|        |        |   |        |        |  |
|--------|--------|---|--------|--------|--|
| GW101F | 1.20mm | No adhesive tape on underside of the supercapacitor | GW101G | 1.30mm | Adhesive tape on underside, release tape removed |
| GW201F | 2.50mm |   | GW201G | 2.60mm |  |

## Definition of Terms

In its simplest form, the Equivalent Series Resistance (ESR) of a capacitor is the real part of the complex impedance. In the time domain, it can be found by applying a step discharge current to a charged cell as in Fig. 1. In this figure, the supercapacitor is pre-charged and then discharged with a current pulse,  $I=1\text{A}$  for duration  $0.01$  secs.

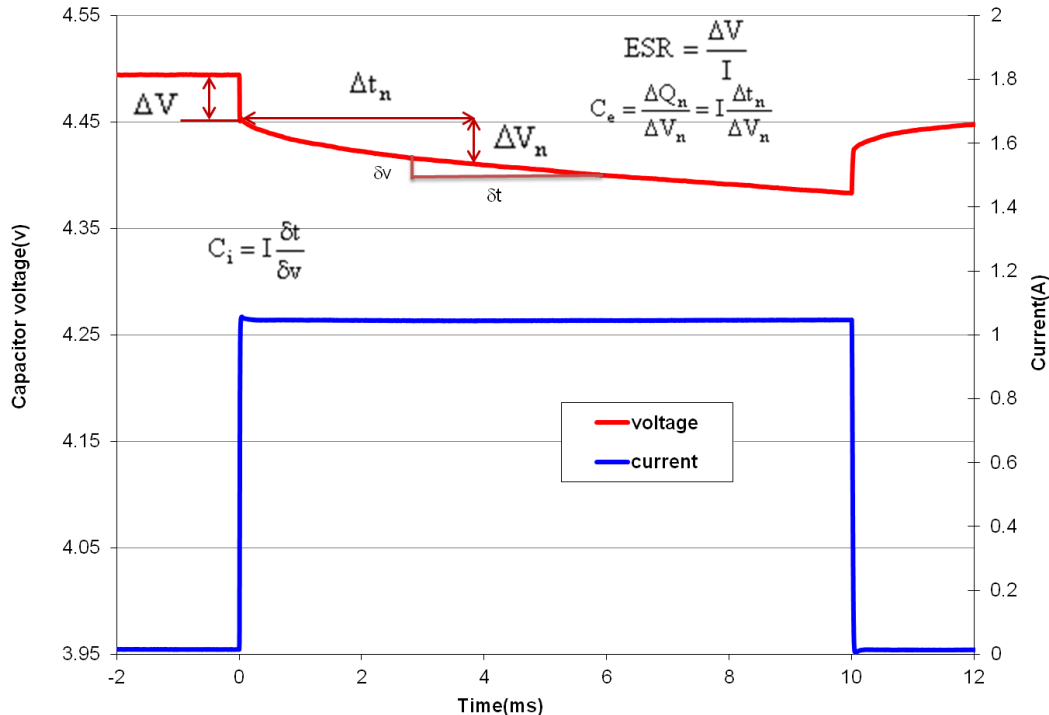


**Figure 1: Effective capacitance, instantaneous capacitance and ESR for a GW201**

The ESR is found by dividing the instantaneous voltage step ( $\Delta V$ ) by  $I$ . In this example  $= (4.494\text{V} - 4.457\text{V}) / 1.02\text{A} = 36\text{m}\Omega$ .

The instantaneous capacitance ( $C_i$ ) can be found by taking the inverse of the derivative of the voltage, and multiplying it by  $I$ .

The effective capacitance for a pulse of duration  $\Delta t_n$ ,  $C_e(\Delta t_n)$  is found by dividing the total charge removed from the capacitor ( $\Delta Q_n$ ) by the voltage lost by the capacitor ( $\Delta V_n$ ). For constant current  $C_e(\Delta t_n) = I \times \Delta t_n / \Delta V_n$ .  $C_e$  increases as the pulse width increases and tends to the DC capacitance value as the pulse width becomes very long ( $\sim 10$  secs). After 2msecs, Fig 1 shows the voltage drop  $V_{2\text{ms}} = (4.457\text{V} - 4.422\text{V}) = 35\text{mV}$ . Therefore  $C_e(2\text{ms}) = 1.02\text{A} \times 2\text{ms} / 35\text{mV} = 58.3\text{mF}$ . After 10ms, the voltage drop  $= 4.457\text{V} - 4.383\text{V} = 74\text{mV}$ . Therefore  $C_e(10\text{ms}) = 1.02\text{A} \times 10\text{ms} / 74\text{mV} = 138\text{mF}$ . The DC capacitance of a GW201 =  $350\text{mF}$ . Note that  $\Delta V$ , or  $IR$  drop, is not included because very little charge is removed from the capacitor during this time.  $C_e$  shows the time response of the capacitor and it is useful for predicting circuit behavior in pulsed applications.


## Measurement of DC Capacitance

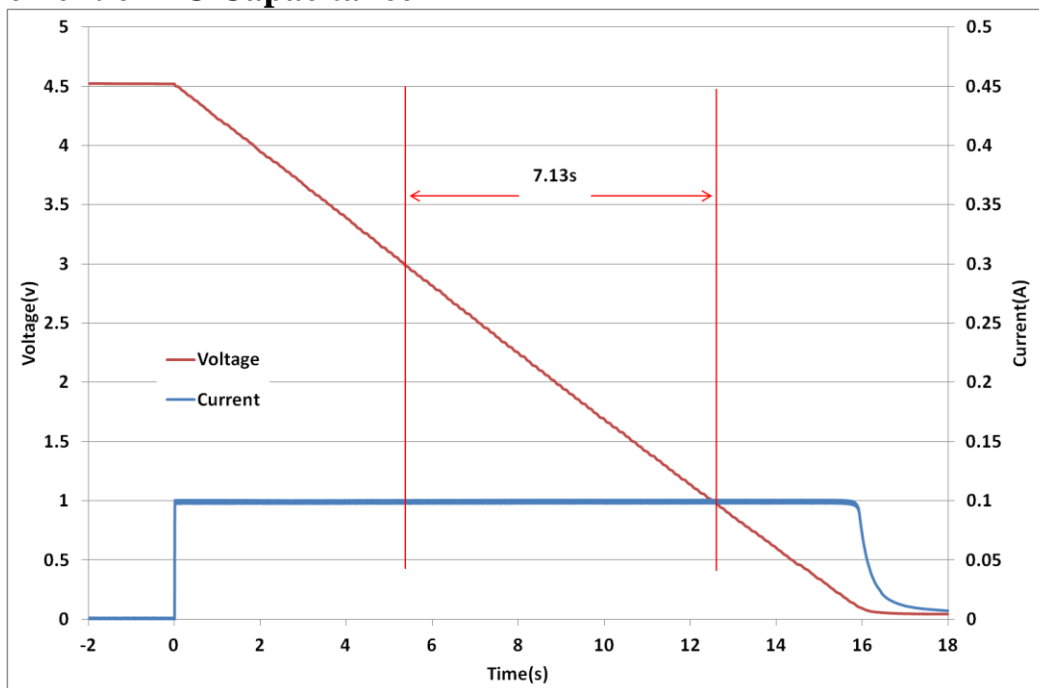

**Fig 2: Measurement of DC Capacitance for a GW201**

Fig 2 shows the measurement of DC capacitance by drawing a constant 100mA current from a fully charged supercapacitor and measuring the time taken to discharge from 1.5V to 0.5V for a single cell, or from 3V to 1V for a dual cell supercapacitor. In this case,  $C = 0.1A \times 7.13s / 2V = 356.5mF$ , which is well within the 350mF +/- 20% tolerance for a GW201 cell.


## Measurement of ESR

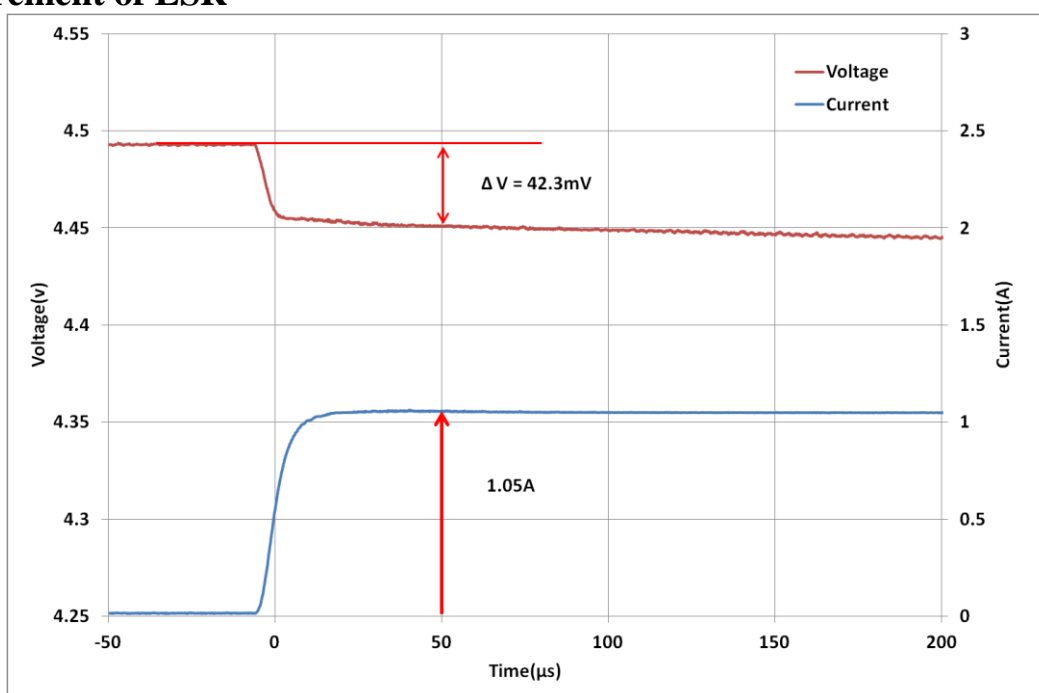

**Fig 3: Measurement of ESR for a GW201**

Fig 3 shows DC measurement of ESR by applying a step load current to the supercapacitor and measuring the resulting voltage drop. CAP-XX waits for a delay of 50μs after the step current is applied to ensure the voltage and current have settled. In this case the ESR is measured as  $42.3mV / 1.05A = 40.3m\Omega$ .


## Effective Capacitance

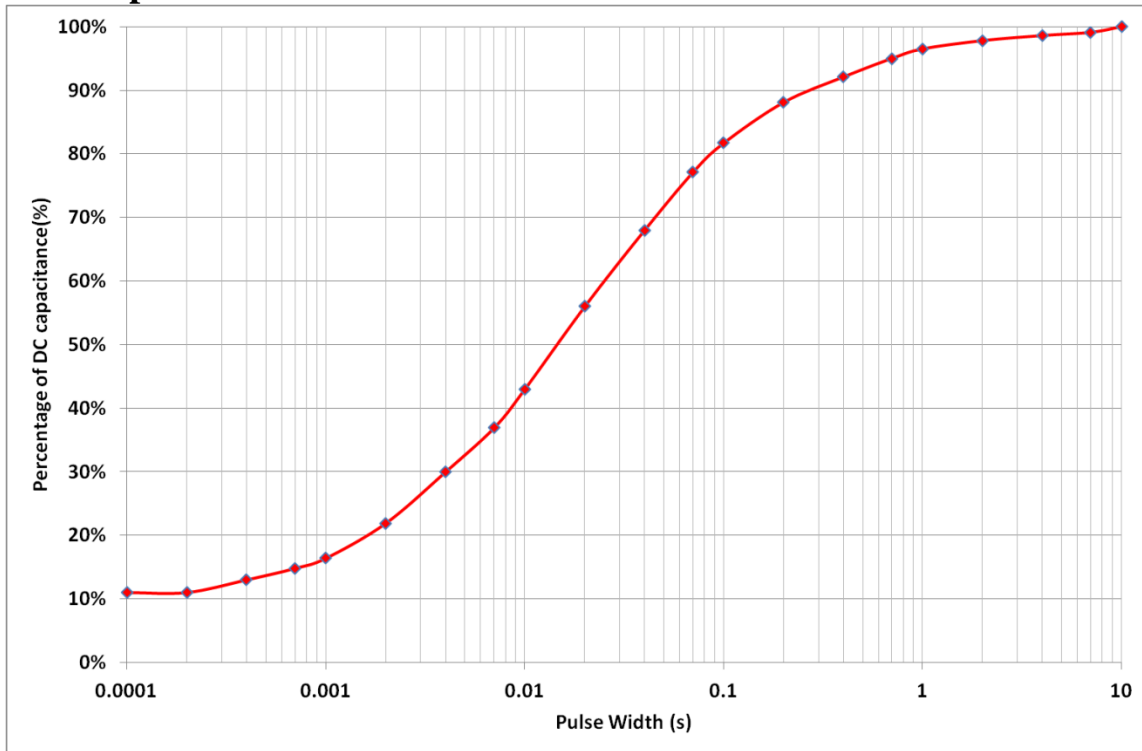

**Figure 4: Effective Capacitance**

Fig 4 shows the effective capacitance for the GW101, GW201 @ 23°C. This shows that for a 1msec PW, you will measure 16% of DC capacitance or 112mF for a GW101 or 56mF for a GW201. At 10msecs you will measure 43% of the DC capacitance, and at 100msecs you will measure 82% of DC capacitance. Ceffective is a time domain representation of the supercapacitor's frequency response. If, for example, you were calculating the voltage drop if the supercapacitor was supporting 1A for 10msecs, then you would use the  $C_{eff}(10msecs) = 43\%$  of DC capacitance = 150mF for a GW201, so  $V_{drop} = 1A \times ESR + 1A \times \text{duration}/C = 1A \times 70m\Omega + 1A \times 10ms / 150mF = 137mV$ . The next section on pulse response shows how the effective capacitance is sufficient for even short pulse widths.


## Pulse Response

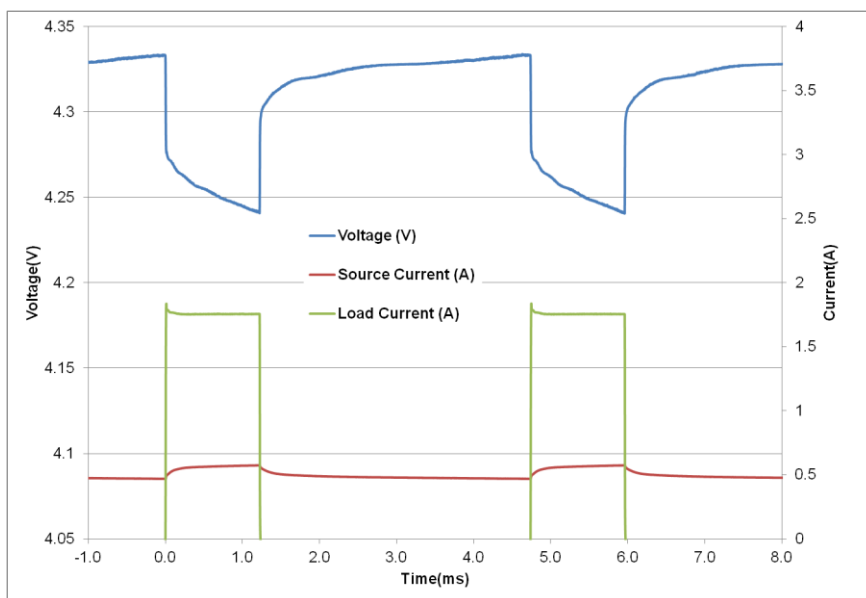

**Fig 5: GW201 Pulse Response with GPRS Class 10 Pulse Train**

Fig 5 shows that the GW201 supercapacitor does an excellent job supporting a GPRS class 10 pulse train, drawing 1.8A for 1.1ms at 25% duty cycle. The source is current limited to 0.6A and the supercapacitor provides the 1.2A difference to achieve the peak current. At first glance the freq response of Fig 8 indicates the supercapacitor would not support a 1ms pulse, but the  $C_{eff}$  of 56mF coupled with the low ESR supports this pulse train with only ~93mV drop in the supply rail.


## DC Capacitance variation with temperature

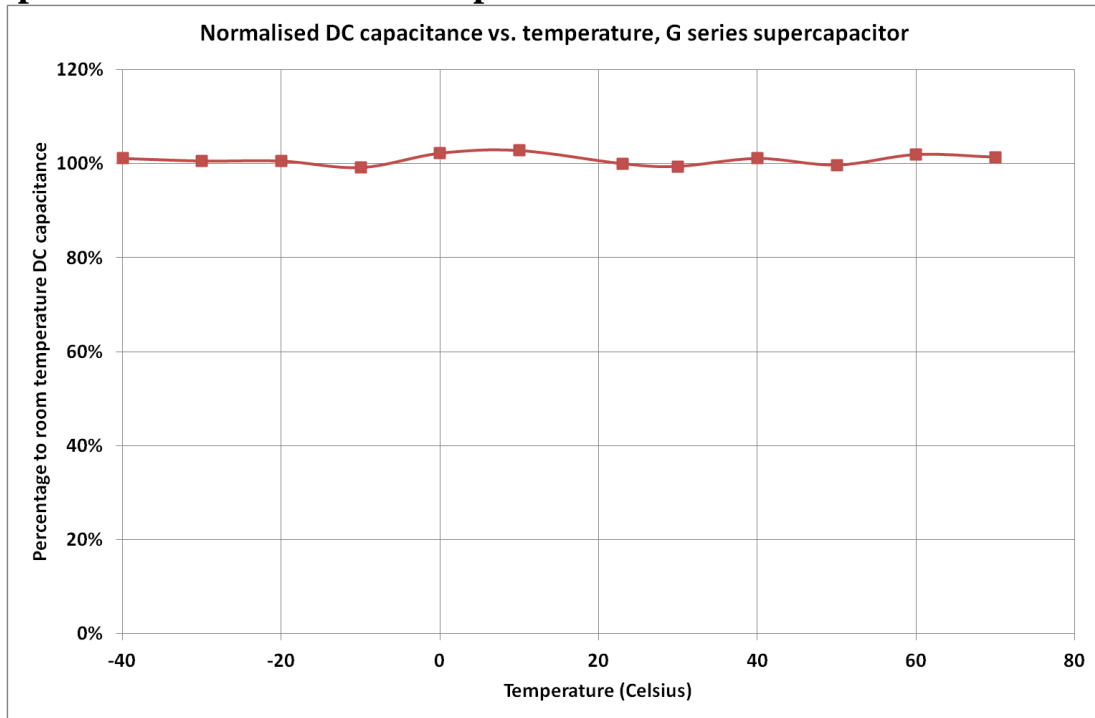

**Figure 6: Capacitance change with temperature**

Fig 6 shows that DC capacitance is approximately constant with temperature.

## ESR variation with temperature

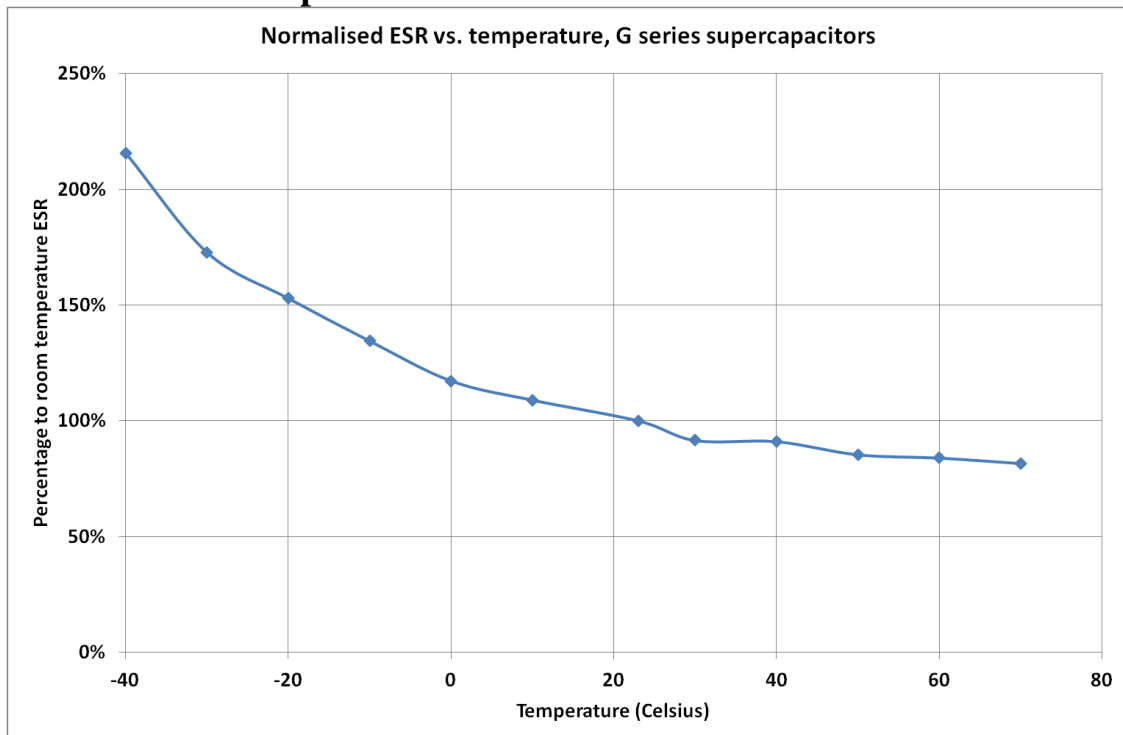

**Figure 7: ESR change with temperature**

Fig 7 shows that ESR at  $-40^{\circ}\text{C}$  is  $\sim 2.2 \times$  ESR at room temp, and that ESR at  $70^{\circ}\text{C}$  is  $\sim 0.80 \times$  ESR at room temperature.

Frequency Response

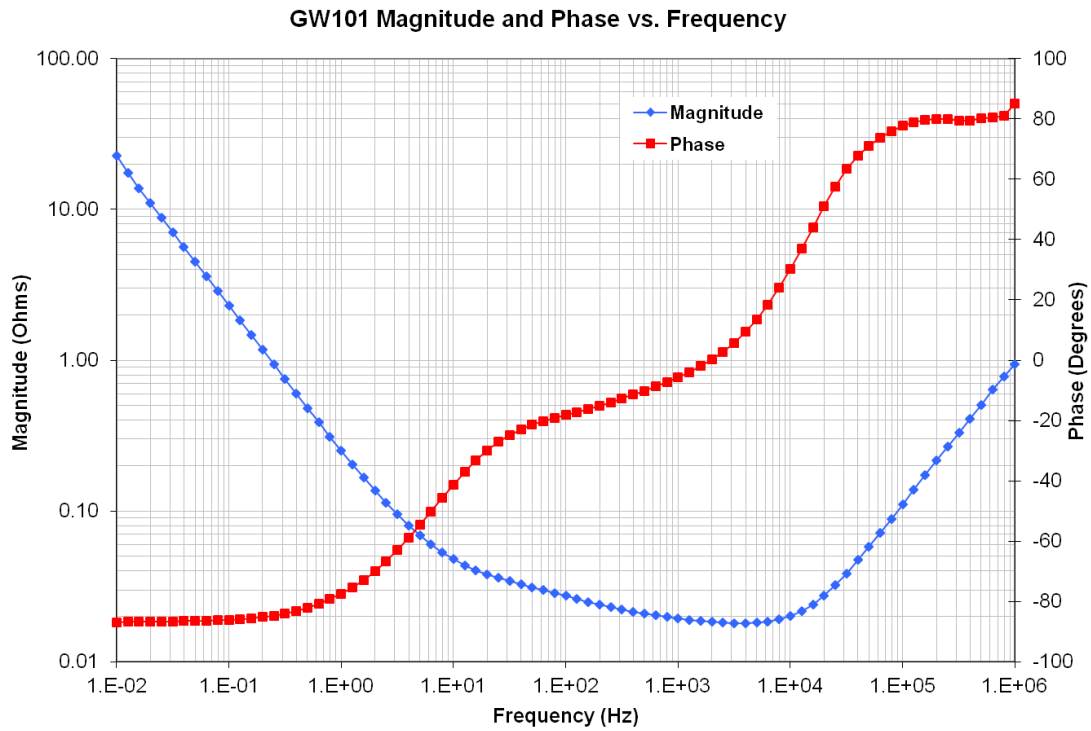


Fig 8: Frequency Response of Impedance (biased at 2.3V with a 50mV test signal)


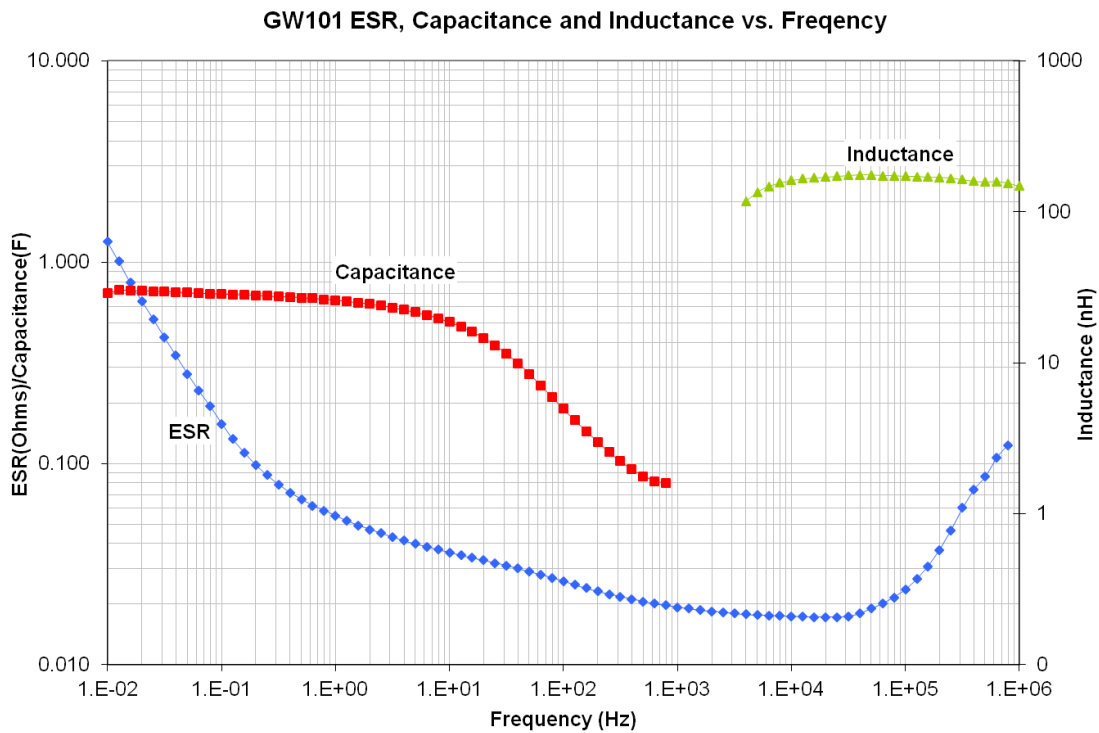


Fig 9: Frequency Response of ESR, Capacitance & Inductance

Fig 8 shows the supercapacitor behaves as an ideal capacitor until approx 4 Hz when the magnitude no longer rolls off proportionally to 1/freq and the phase crosses -45°. Performance of supercapacitors with frequency is complex and the best predictor of performance is Fig 4 showing effective capacitance as a function of pulswidth.


## Leakage Current

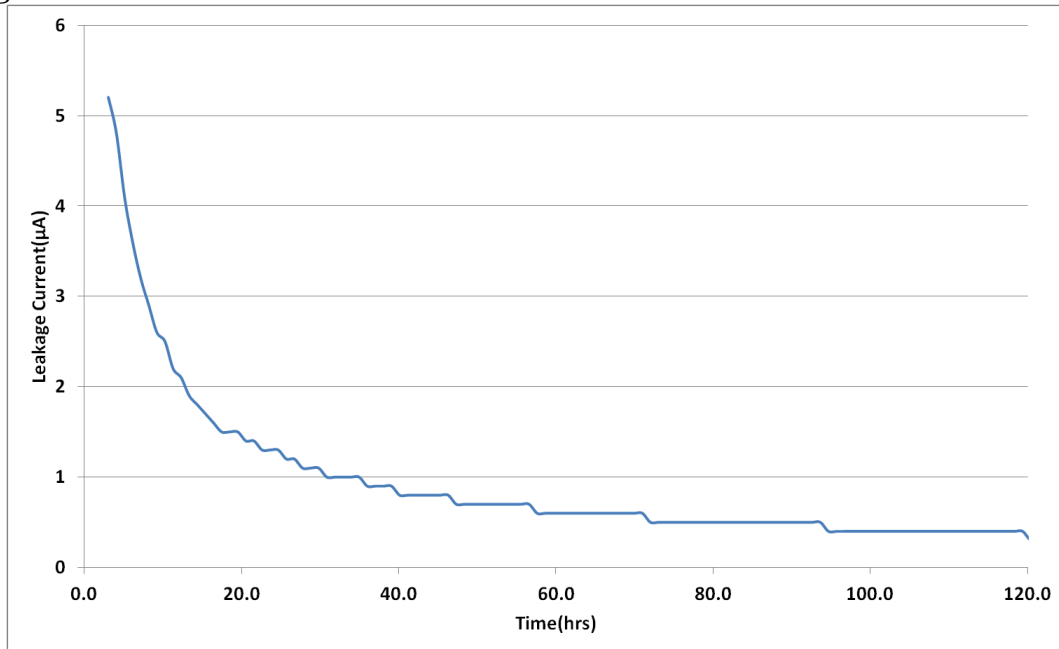

**Fig 10: Leakage Current**

Fig 10 shows the leakage current for GW101 at room temperature. The leakage current decays over time and the equilibrium value leakage current will be reached after ~120hrs at room temperature. The typical equilibrium leakage current is  $0.5\mu\text{A}$  at room temperature. At  $70^{\circ}\text{C}$  leakage current will be  $\sim 5\mu\text{A}$ .


## Charge Current

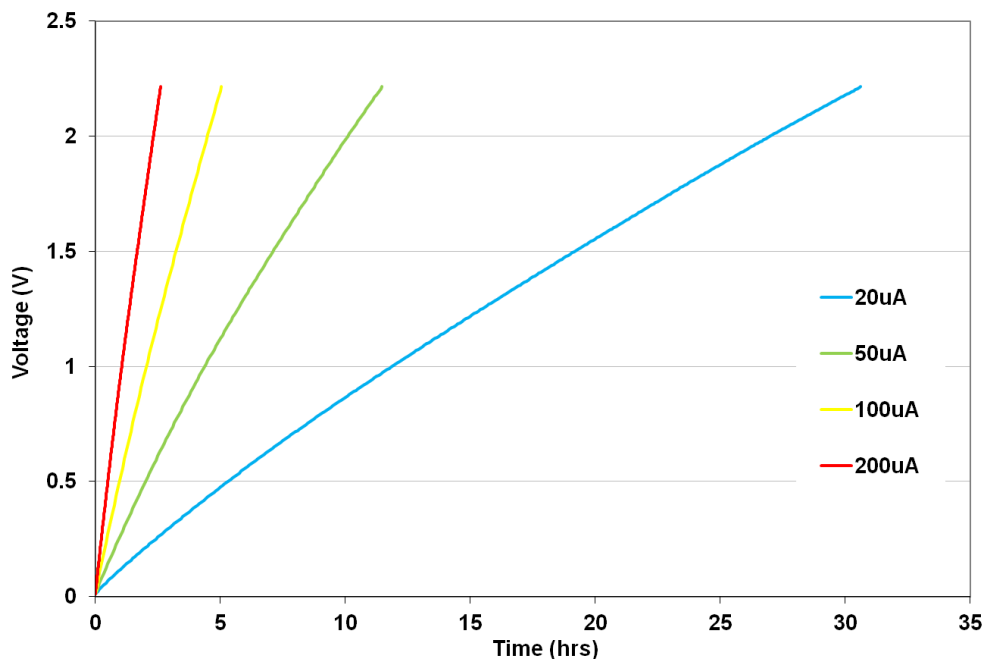

**Fig 11: Charging an GW101 with low current**

The corollary to the slow decay in leakage currents shown in Fig 10 is that charging a supercapacitor at very low currents takes longer than theory predicts. At higher charge currents, the charge rate is as theory predicts. For example, it should take  $0.7\text{F} \times 2.3\text{V} / 0.00002\text{A} = 22.4\text{hrs}$  to charge a  $0.7\text{F}$  supercapacitor to  $2.3\text{V}$  at  $20\mu\text{A}$ , but Fig 11 shows it took 30hrs. At  $100\mu\text{A}$  charging occurs at a rate close to the theoretical rate.

## RMS Current

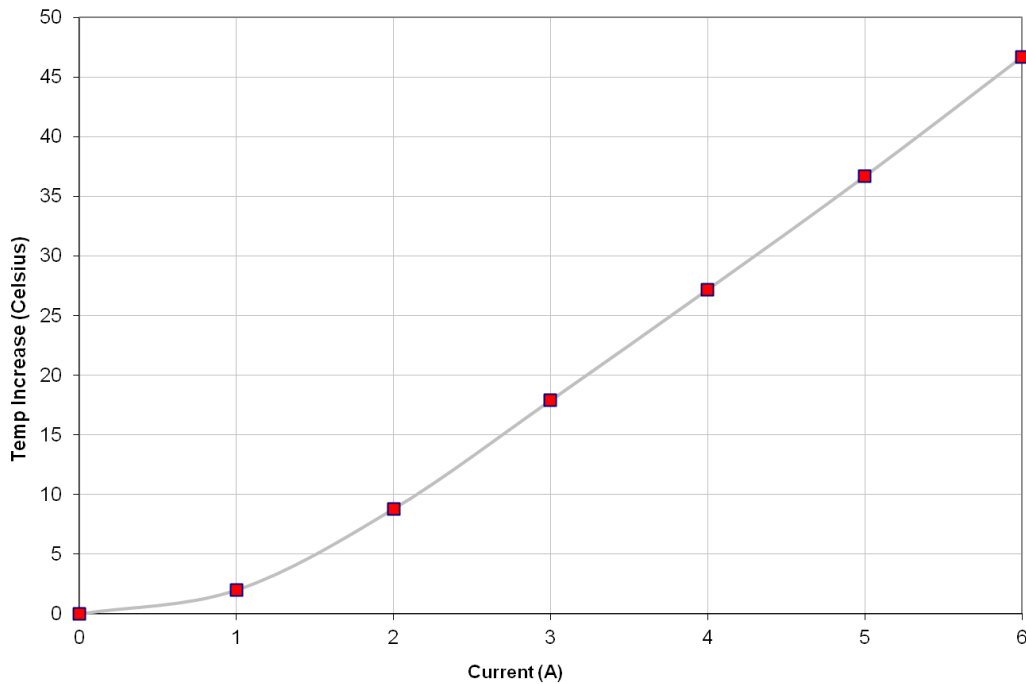

**Fig 12: Temperature rise in GW201 with RMS current**

Continuous current flow into/out of the supercap will cause self heating, which limits the maximum continuous current the supercapacitor can handle. This is measured by a current square wave with 50% duty cycle, charging the supercapacitor to rated voltage at a constant current, and then discharging the supercapacitor to half rated voltage at the same constant current value. For a square wave with 50% duty cycle, the RMS current is the same as the current amplitude. Fig 12 shows the increase in temperature as a function of RMS current. From this, the maximum RMS current in an application can be calculated, for example, if the ambient temperature is 40°C, and the maximum desired temperature for the supercapacitor is 70°C, then the maximum RMS current should be limited to 4.3 A, which causes a 30°C temperature increase.

## CAP-XX Supercapacitors Product Guide

Refer to the package drawings in the CAP-XX Supercapacitors Product Guide for detailed information of the product's dimensions, PCB landing placements, active areas and electrical connections.

Refer to the CAP-XX Supercapacitors Product Guide for information on endurance and shelf life, transportation and storage, assembly and soldering, safety and RoHS/EREACH certification.