



## BTR2458

2.4 and 5 GHz

Multiposition Antenna

### Features

- ◆ Groundplane Independent
- ◆ Covers 2.4 and 5 GHz bands
- ◆ Locks in three positions for flexibility
- ◆ Ideal for fixed and mobile terminals

### Specifications

Radiating element	1/2 Wave Element
Frequency range	2400-2500 / 4900-6000 MHz
Gain	2 dBi
Polarisation	Linear
VSWR	< 2.0:1
Power rating	10W
Connector	SMA-Male (multiposition)
Dimensions	99.5 x 11mm (max)

### Popular Ordering Options

FBTR35160-SM-KR	BTR2458 antenna with SMA-Male connector
-----------------	---

Specifications subject to change without notice.

5 Little Balmer  
Buckingham Industrial Park  
Buckingham  
MK18 1TF  
UK


Tel: +44 (0)1280 824055  
Fax: +44 (0)1280 817179  
Email: [sales@ead-ltd.com](mailto:sales@ead-ltd.com)  
Web: [www.ead-ltd.com](http://www.ead-ltd.com)

**EAD**   
embedded antenna design ltd  
*Delivering Antenna Innovation*




## PBTR2458 | 2.4 / 5GHz Multiposition Antenna

### VSWR

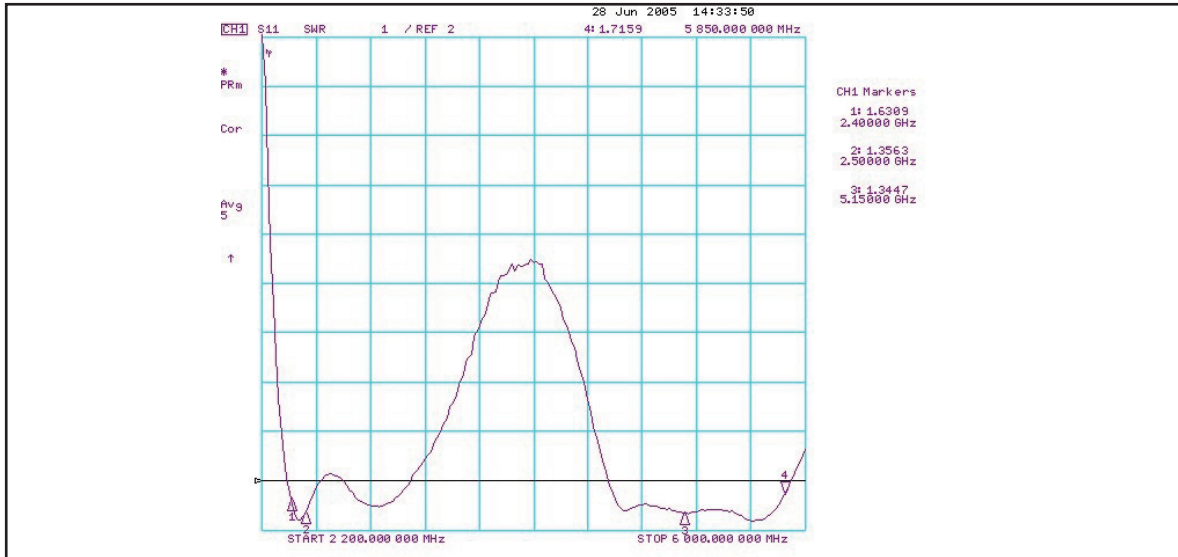

### Outline Drawing

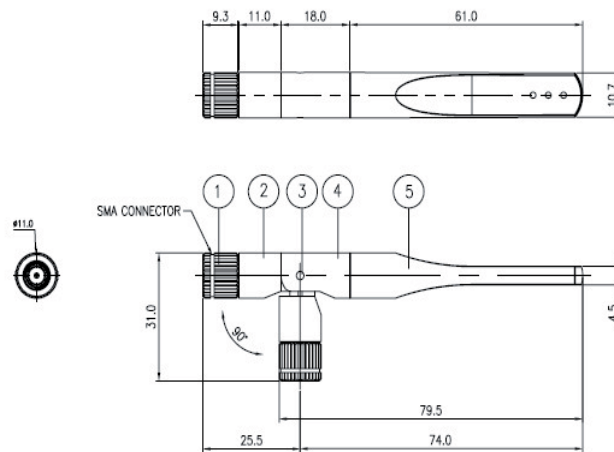

Specifications subject to change without notice.

5 Little Balmer  
Buckingham Industrial Park  
Buckingham  
MK18 1TF  
UK

Tel: +44 (0)1280 824055  
Fax: +44 (0)1280 817179  
Email: sales@ead-ltd.com  
Web: www.ead-ltd.com